
Harris Corporation expressly reserves the right to supplement or modify these Disclosures as appropriate upon receipt of further information and discovery. The Huawei '690 Patent Accused Products (as that term is defined and the corresponding devices are identified in Harris's P.R. 3-1 and P.R. 3-2 disclosures cover pleading) infringe at least the following claims. References to instrumentalities in this chart are exemplary only and should not be construed as limiting the scope of any claim of the '690 patent. The Huawei '690 Patent Accused Products satisfy each claim element below literally. The Huawei '690 Patent Accused Products also satisfy claim elements under the Doctrine of Equivalents, including without limitation where specifically identified below, because they include and perform substantially similar functionality.


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
32. A wireless local or metropolitan area network comprising:	The Huawei '690 Patent Accused Products infringe this claim. Huawei makes, uses, sells, offers to sell and/or imports equipment used in wireless local or metropolitan area networks, including its WLAN products and consumer devices, and on information and belief, makes, uses, sells, offers to sell and/or imports wireless local or metropolitan area networks in the United States. Without the benefit of discovery, Harris identifies exemplary networks, including, without limitation,
	networks deployed at Huawei's 13 U.S. facilities; networks deployed in CloudCampus solutions such as those deployed for Cloud4Wi, in San Francisco, CA; other enterprise networks deployed for Weichai Power in Chicago, Ill., and Crowley Independent School District in Crowley, Tx.
	On information and belief, Huawei's United States Offices utilize the Huawei WLAN products to form a wireless local or metropolitan area network (Wireless LAN/MAN). These offices include Huawei Technologies USA, Inc. HQ's offices in Plano, Texas; Broomfield, CO; Houston, TX, Reston, VA; Philadelphia, PA; Irvine, CA; Cupertino, CA; Huawei Device USA, Inc. HQ's offices in Plano, Tx; Bellevue, WA; Mountain View, CA; Alpharetta, GA; Bridgewater, NJ; Santa Clara, CA; and San Diego, CA, as well as Futurewei Technologies, Inc.'s offices in Santa Clara, CA; Plano, TX, Bridgewater, NJ; Rolling Meadows, IL; Greensboro, NC; Louisville, CO; San Diego, CA; and Bellevue, WA. https://www.huawei.com/us/contact-us#office

'690 PATENT CLAIM 32		Infringement By Huaw	EI CORPORATIO	ON	
	Further, in 2017, Huawei part solution.	nered with Cloud4Wi in San	Francisco Califo	ornia to install its CloudCam	pus
	See https://cloud4wi.com/cloud4wi-and-huawei/				
	Huawei CloudCampus solutions utilize various switches and access points, for example:				
	To fully un	lock the value of campus ne	tworks, you nee	ed these products	
	Switch	Fast deployment, secure and reliable easy O&M, and agile innovation	WLAN	All-scenario, customized Wi-Fi & IoT integration	
		(
	S12700 Agile Switch	S5720-L Simplified Gigabit Ethe		S5720-SI Standard Gigabit Ethernet Switch	

'690 PATENT CLAIM 32	Infringement By Huawei Corporation				
	To fully unlock the value of campus networks, you need these products				
	Switch	Fast deployment, secure and reliable easy O&M, and agile innovation	WLAN	All-scenario, customized Wi-Fi & IoT integration	
			NAME		
	AP4050DN	N-E AP4051DN	& AP4151DN	AP8050DN & AP8150DN	
	http://e.huawei.com/topic/cl	oudcampus-en/index.htm	<u>nl</u>		

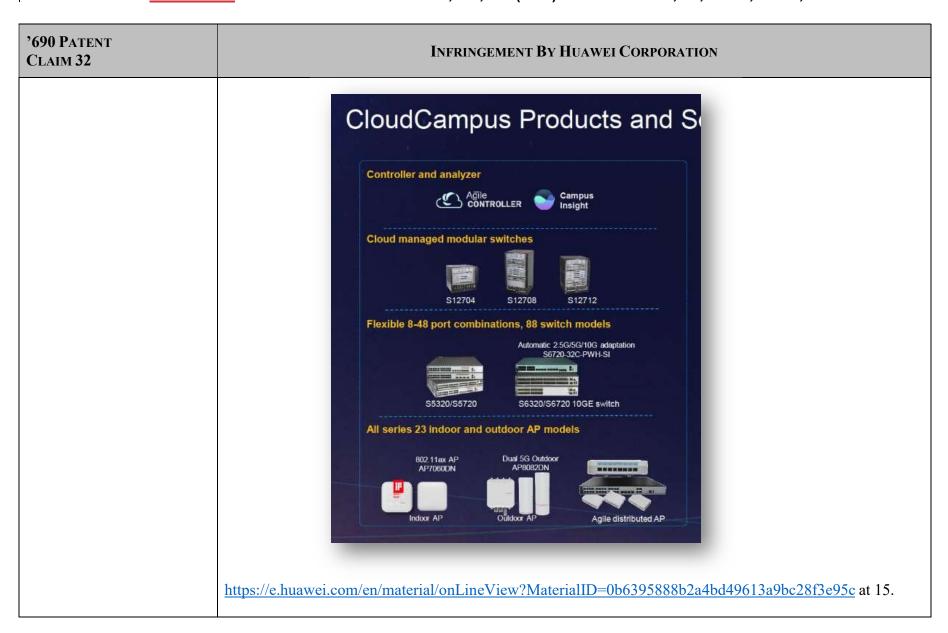

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Further, Campus networks are an exemplary network that may work with Huawei eSight: Automatic deployment Centralized monitoring Visualized diagnosis Intelligent capacity analysis eSight Overview Presentation at 6. On information and belief, all Huawei WLAN products incorporate the Wireless Intrusion Detection System (WIDS) as described, for example in the WIDS and WIPS Technology White Paper: "The Wireless Intrusion Detection System (WIDS) and Wireless Intrusion Prevention System (WIPS) functions monitor and prevent the preceding attacks on WLANs.
	This document describes WIDS and WIPS technologies used by Huawei WLAN products." Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 1.

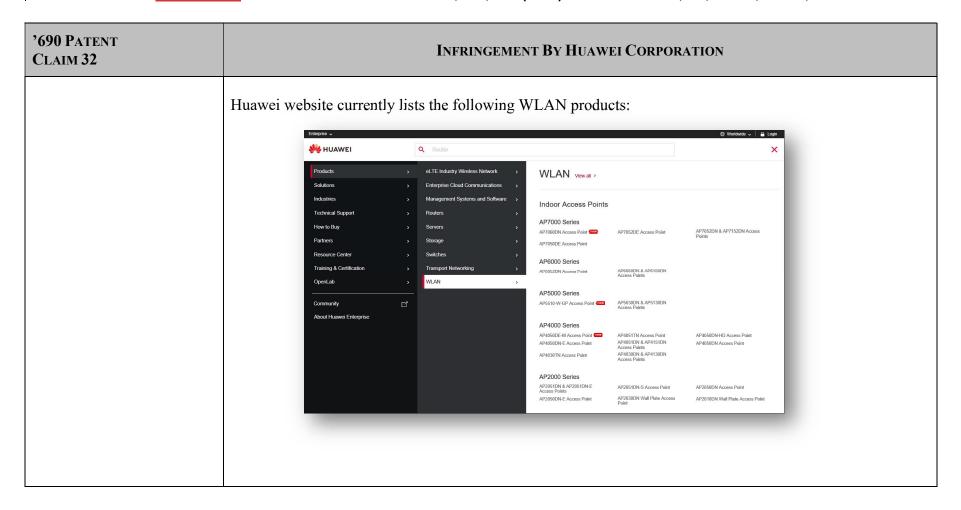

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Indoor Access Points
	AP7000 Series
	AP7060DN Access Point AP7052DE Access Point AP7052DN & AP7152DN Access Points
	AP7050DE Access Point
	AP6000 Series
	AP6052DN Access Point AP6050DN & AP6150DN Access Points
	AP5000 Series
	AP5030DN & AP5130DN Access Point AP5030DN & AP5130DN
	AP4000 Series
	AP4050DE-M Access Point AP4051DN & AP4051DN & AP4050DN-HD Access Point AP4050DN-E Access Point AP4051DN & AP4151DN ACCESS Point ACCESS
	AP4030TN Access Point AP4030DN & AP4130DN Access Points
	AP2000 Series
	AP2051DN & AP2051DN-E AP2051DN-S Access Point AP2050DN Access Point AP2050DN Access Point
	AP2050DN-E Access Point AP2030DN Wall Plate Access AP2010DN Wall Plate Access Point Point
	AP1000 series
	AP1050DN-S Access Point

'690 PATENT CLAIM 32	Infringement By Huawei Corporation		
	Outdoor Access Points AP8082DN & AP8182DN		
	AC6805 Access Controller AC6806 Access Controller AC6508 Access Controller AC6005 Access Controller AC6005 Access Controller AC6003 Access Controller AC6005 Access Cont		
	Scenario-specific product series AD9431DN-24X Central Access		
	https://e.huawei.com/us/products/enterprise-networking/wlan (as of March 13, 2019). See also, e.g., Huawei Access Point Datasheets ("Rogue device monitoring Huawei APs support WIDS/WIPS, and can monitor, identify, defend, counter, and perform refined management on the rogue		
	devices, to provide security guarantees for air interface environment and wireless data transmission.") On information and belief, all APs support WIDS, see also, e.g., AP2030DN at 2; AP4050DN-E at 3; AP4051DN & AP4151DN at 3; AP8050DN & AP8150DN at 3; AP6052DN at 4; AP6050DN&AP6150DN at 4. See also AP3050DE Product Description, available at		

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	https://support.huawei.com/enterprise/en/wlan/ap3050de-pid-23482930?offeringId=21946538, at 13 ("Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS), including rogue device detection and countermeasure, attack detection and dynamic blacklist, and STA/AP blacklist and whitelist"); Huawei AP7060DN Access Point Data Sheet, available at https://e.huawei.com/en/related-page/products/enterprise-network/wlan/indoor-access-points/ap7060dn/wlan-ap7060dn, at 3 ("Huawei APs support WIDS/WIPS,"). See also, Huawei Enterprise AP Series 802.11ac Brochure: For enterprise networks of different types and scales, Huawei offers the following AP models: 802.11ac indoor 7X30 series and 5X30 series APs, outdoor 802.11ac 8X30 series APs, and 802.11ac AP9130DN vehicle-mounted APs specially designed for rail transit communications.

'690 PATENT CLAIM 32		Infringemi	ENT BY HUAWI	EI CORPORATIO	ON
	Table 5-2 Features of Hu	awei 802.11ac APs			
	Huawei 802.11ac AP	AP5030DN/ AP5130DN	AP7030DE	AP8030DN/ AP8130DN	AP9130DN
	Target market	Mid-range market: small- to medium-sized enterprises	High-end market: medium- to large- sized enterprises	Large campus outdoor coverage or backhaul	Rail transit
	Working mode	Fit/Fat AP	Fit AP	Fit/Fat AP	Fat AP
	Dying gasp	-	7	√	7
	Wireless positioning/ Real-Time Location System (RTLS)	4	√	4	ğ
	Spectrum analysis	J	J	√	921
	Seamless roaming	J	4	√	√
	IPv6	√	1	V	J
	Wireless Intrusion Prevention System (WIPS)/Wireless Intrusion Detection System (WIDS)	Į.	V	Į.	1

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	NAC
	Network Admission Control (NAC) is an end-to-end access security framework and includes MAC address authentication"
	Huawei AR120&AR150&AR160&AR200&AR500&AR510&AR1 200&AR2200&AR3200&AR3600 Series Enterprise Routers Product Description, Issue 05 (2016-06-15) at 43.
	Routers may further operate as an Access Controller and provides MAC address authentication for WLAN:
	"3.2.6 WLAN
	A wireless local area network (WLAN) connects two or more computers or devices and enables the devices to communicate by using the wireless telecommunication technology. WLAN uses the wireless technology to implement fast Ethernet access. The primary advantage of WLAN is that terminals, such as computers, can access a network through a wireless medium rather than a physical cable. This facilitates network construction and allows users to move around without interrupting communication. WLAN is more flexible than traditional wired access.
	WLAN is widely used in public areas such as on campuses, business centers, and airports. The WLAN uses cables at the backbone layer, and users access the WLAN through one or more access points (APs) using radio waves. The transmission distance of an AP is tens of meters.

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	IEEE 802.11 is widely used by WLANs. The device can function as an access controller (AC) or a Fat access point (FAT AP). The device as the AC or Fat AP supports 802.11a, 802.11b, 802.11g, 802.11an, and 802.11n.
	NOTE
	Only AR121W, AR129W, AR121GW-L, AR129GW-L, AR151W-P, AR156W, AR157W, AR157VW, AR158EVW, AR161W, AR161FGW-L, AR169W, AR161FW-P-M5, AR161FGW-La, AR169FVW, AR169FGVW-L, AR169FGW-L, AR169W-P-M9, AR169RW-P-M9, AR201VW-P, AR207VW, AR510 series, AR503GW-LM7, AR503GW-LcM7, AR1220W, AR1220EVW and AR1220VW support WLAN-FAT AP.
	The device supports the following WLAN features:
	 WLAN user management Dot1X access authentication MAC address authentication Pre-share-key (PSK) authentication EAPOL-Key negotiation User access control AAA for WLAN users Huawei AR120&AR150&AR160&AR200&AR500&AR510&AR1 200&AR2200&AR3200&AR3600 Series Enterprise Routers Product Description, Issue 05 (2016-06-15) at 47.
	See also, e.g., Huawei Remote Unit Datasheets: R450D at 6 ("Security features - WIDS including rogue AP and STA detection, attack detection, STA/AP blacklist and whitelistIntrusion prevention"); R251D & R251D-E ("Wireless intrusion detection system (WIDS) and wireless intrusion prevention system (WIPS), including rogue device detection and countermeasure, attack detection and dynamic blacklist, and STA/AP blacklist and whitelist").

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	See also, e.g., Huawei Access Points (FATAP), V200R007C20, MIB Reference, Issue 05 (2019-03-15), available at https://support.huawei.com/enterprise/en/doc/EDOC1000154350, at Table 1 (listing products), 145-146, 1447-1515 and 2638-2712 (WIDS), 2790-2848 ("Station" / "STA" tables).
	Huawei consumer devices, including laptops, phones and tablets, are also designed to communicate with wireless networks via the IEEE 802.11 protocols. For example, specifications for Huawei smartphones such as the Huawei Mate SE indicate that they support "802.11b/g/n, 2.4 GHz" connectivity and the "Android N+EMUI 5.1" operating system. https://consumer.huawei.com/us/phones/mate-se/specs/. Specifications for Huawei's Mate 10 Pro smartphones indicate that they support "Wi-Fi 2.4G/5G, 802.11a/b/g/n/ac with Wi-Fi Direct support" connectivity and the "Android 8.0" and "EMUI 8.0" operating system. https://consumer.huawei.com/us/phones/mate10-pro/specs/. Specifications for Huawei laptops and tablets such as the Matebook 13 indicate that they support "IEEE 802.11a/b/g/n/ac" connectivity. https://consumer.huawei.com/en/laptops/matebook-13/specs/.
	Huawei consumer devices, including laptops, phones and tablets, also participate in the WIDS system as client stations (also referred to in WIDS and documentation as "STAs" or "ad hoc" devices). See, e.g., Huawei Technologies Co., Ltd., WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 7 ("When receiving a Probe Request, an Association Request, or a Reassociation Request frame, the AP determines whether the sender is an ad hoc device or STA based on the network type specified by the Capability subfield in the Frame Body field of the 802.11 MAC frame") see also id. at 11 ("Rogue STAs: After detecting a rogue STA, a monitor AP uses the BSSID and MAC address of the rogue STA to send a fake unicast Deauthentication frame to contain it. A STA whitelist can also be configured to prevent STAs in the STA whitelist from associating with rogue APs"). See also Huawei Access Points (FATAP), V200R007C20, MIB Reference, Issue 05 (2019-03-15), at 145-146 (MAC authentication table), 1447-1515 and 2638-2712 (WIDS), 2790-2848 ("Station" / "STA" tables). Accordingly, and as further detailed herein, these devices implement aspects of the WIDS system within the "wireless local or metropolitan area network" of the claim (also referred to as a Wireless LAN/MAN in the patent specification).

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can participate in the WIDS system as access points ("APs"), including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also implement intrusion detection according to the claim. <i>See, e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf , at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection
	Security."). The Huawei eSight and eSight Network further incorporates the WIDS system: Wireless Network Security Detection
	The Wireless Intrusion Detection System (WIDS) monitors intrusion devices and non–Wi-Fi interferences and provides frequency spectrum analysis features.
	WIDS management: The WIDS manages wireless network interferences in different categories. Interferences are classified based on user customized rules. Upon detecting an interference, the WIDS chooses whether to generate an alarm based on user alarm configurations. The WIDS can also take countermeasures for unauthorized devices.
	Huawei eSight Full Product Datasheet, CH 12 eSight WLAN Manager; p. 53 (2013-09-03) Huawei Technologies Co., Ltd.; <i>see also</i> eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 58-59 (indicating that, on information and belief, all versions of eSight incorporate WIDS).

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	In another non-limiting example, Huawei installed a Wireless local or metropolitan area network at Waichai in Chicago, Illinois using S9700/S6700/S5700/WLAN products:
	The [Weichai North America] center located in suburban Chicago, which covers 20-acre parcel, and over 300 engineers will be working in this center.
	Huawei offered a comprehensive and tailor-made solution for Weichai, which provided end-to-end applications and services based on Huawei products [including] Two clustered S9706 LAN switches stacking with service interfaces at core layer combined with stacked gigabyte access S5700 POE LAN switches to create a loop-free network with high reliability.
	High density wireless users access capability and intelligent wireless network
	The Huawei AP6010 LAN access points provide integrated built-in MIMO antenna and spectrum analysis for even frequency coverage with no coverage hole, concurrent user access rate 20 percents higher than industry average. Moreover, wireless authentication and authorization can provide fine-grained access control for the security of WLAN network.
	Huawei was chosen as the only vendor by Weichai


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Huawei provided the necessary infrastructure of networks, Unified Communications and Collaboration (UC&C), IT solutions and simplified network management. Huawei In Large Enterprise Case Studies at 12-13 (available at
	Weichai Power Chicago Campus HUAWEI ENTERPRISE ICT SOLUTIONS A BETTER WAY
	Background & Requirements ■ Welchal is a major automotive and equipment manufacturer, which specializes in the research, development, manufacturing, and sales of diesel engines. ■ Welchal North America operation and R&D center located in Chicago, the network infrastructure should provide wire access and wireless access, and provide 1GE wirespeed to the desktop and be able to upgrade up to 40 or 100 GE for the massive data processing.
	Huawei oflered a comprehensive and tailor-made solution for Weichal, which provided end- to-end applications and services based on Huawei products with the following outstanding features: High reliability and loop-free network. High density wireless users access capability and intelligent wireless network. Large-capacity and future proof performance campus network. IPv4/IPv6 dual stack, smooth evolution for Next-Generation Network. The related Products: S9700/S9700/S5700/WLAN.
	Benefits ■Huawei provided the necessary infrastructure of networks, Unified Communications and Collaboration (UC&C) and simplified network management. Huawei had resolved the potential compatibility problems come from several vendors, so Weichai only need to focus on their own business. ■ Since Huawei equipment is up to 50 percent more power efficient than those offered by other vendors, Weichai made the network a truly green campus network.
	enterprise.huawei.com • Huawei Confidential • 2
	http://www.enterprisesolutions.altech.co.za/sites/. collab_d7_live/files/Huawei_in_Large_Enterprise%28include%20Small%20Campus%29_1.pdf) HUAWEI WLAN Successful Stories PowerPoint at 2. Huawei further installed networks at Crowley Independent Schools in Texas:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
CLAIM 32	Crowley Independent School District in USA Background & Requirement - Conviey Independent School District is a public school district based in Crowley. Torks. - Serves the Inginisate development and School District is a public school district based in Crowley. Torks. - What is a public school District in USA Huawel April 100H-AGN provide in most 500Mps, wineless correction for the latency April 100H-AGN provide in most 500Mps, wineless correction for the latency April 100H-AGN provide in most 500Mps, wineless correction for the latency April 100H-AGN provide in most 500Mps, wineless correction for the latency approaches WLAN Applications of the minimal provide in the most 500Mps, wineless correction for the latency approaches WLAN Applications and School
	Sears, one of the leading US retail enterprises, decided to use Huawei's technology and equipment when upgrading the networks of hundreds of stores. Northern Michigan University, Crowley Independent School District in Texas and Digital Domain, a visual

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	effects and digital production company in Hollywood, have adopted storage, Internet solutions and other services provided by Huawei.
	http://www.globaltimes.cn/content/864994.shtml
	On information and belief, all Huawei WLAN products, when combined to form a wireless local or metropolitan area network, are able to utilize the WIDS/WIPS technology. Huawei WLAN products are specifically designed to be linked together to form a wireless network, and to be used with other laptops, tablets, phones and WiFi capable devices, and Huawei directs and encourages such conduct. Accordingly, Huawei indirectly infringes this claim by inducing infringement.
	See e.g., WLAN Installation Service, available at
	http://support.huawei.com/enterprise/NewsReadAction.action?newType=05&contentId=NEWS1000006056; Enterprise NMS and Application Software Installation Service, available at
	http://support.huawei.com/enterprise/NewsReadAction.action?newType=05&contentId=NEWS1000006040
	and other channel partner service descriptions at https://e.huawei.com/en/partner/partner-program/services
	In yet a further example, Huawei has a 3, 4 and 5 Star and Global Certified Service Partner Certification
	program, in which, among other things, allows partners to receive Partner Enablement Support from
	Huawei. Service partners must meet certain requirements, for example:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Certification Requirement HCNA × 2 Domain: Enterprise Networking (R&S, WLAN, and Security), or Enterprise Networking (Transmission and Access), or Enterprise Cloud Communications (UC, CC, VC, and IVS), or IT (Storage, Server, Cloud Computing, and DC), or Network Energy (DCF and UPS)

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Huawei offers its partners numerous trainings and certificates related to Enterprise Network, including courses that train individuals on designing and deploying WLAN networks, including aspects of WIDS/WIPS and network security. See, e.g., Training Description for Enterprise Network, available at <a apply-for-specialization="" e.huawei.com="" en="" href="https://e.huawei.com/en/marketing-material/partner-document/partner/en/channel%20partner%20program/legal%20-%20commercial/services/learning%20services/hw 201676; see also https://e.huawei.com/en/partner/partner-program/apply-for-specialization/network ; see also https://e.huawei.com/en/partner/partner-program/Overview/Enablement ("Huawei's Training System Huawei offers a broad variety of training courses such as HALP training, e-learning, and instructor-led courses to help channel partners improve their capabilities.")
	Huawei has at least 11 service partners that are part of its Enterprise Networking CSP Program, including: Eccom Network(USA) Inc FusionStorm China Telecom (Americas) Corporation Datalink Networks, Inc. Entisys360 Vlan24 Inc CANCOM US UNeed Solutions Inc. dba Noviant MJP Technologies Inc Unified Connexions, Inc. Stellar Services
	See https://e.huawei.com/en/partner/find-a-partner Huawei encourages its partners to "promote Huawei's brand in the enterprise business market.":

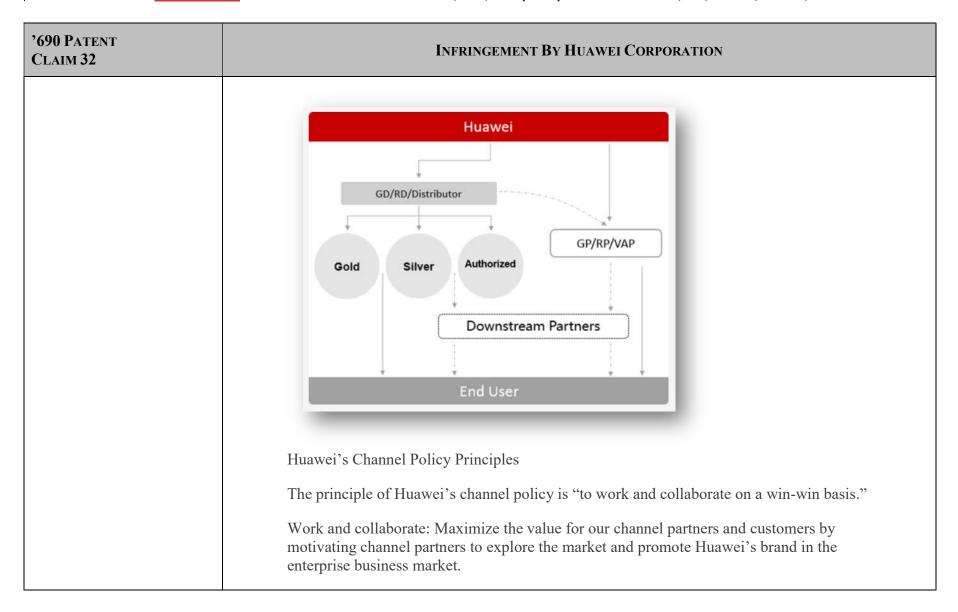

Case 2:18-cv-00439-JRG Document 92-13 Filed 08/27/19 Page 22 of 96 PageID #: 2721

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
CLAIM 32	Classification of Channel Partners Tier1 Partner: Distributor and Value Added Partner (VAP). Distributors include Global Distributors (GDs), Regional Distributors (RDs), and Local Distributors. Global Distributors and Regional Distributors are distributors that run business in multiple countries. Global Partners (GPs) and Regional Partners (RPs) work with Huawei in multiple countries and regions. Tier 2 Partner: Gold Partner, Silver Partner, and Authorized Partner
	For more information visit our Channel Partner Program page. https://e.huawei.com/en/partner/become-a-partner

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Huawei Channel Structure Pop (Global Partner) Pop (Regional Partner) Pop (Regional Distributor) Pop (Regional Partner) Pop (Regional Partner
	 Further Distributors Act as major partners of Huawei's Enterprise Business Group (BG) in regional markets. Promise to accomplish business targets for related products and targets for distribution business. https://e.huawei.com/en/partner/partner-program/policy At least two Huawei Distributors exist in the United States,

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	ASI Computer Technologies, Inc. in Fremont, CA; (selling Enterprise Cloud Communications, Data Center Switch, IT, Cloud Computing, Transport Network, Security, Access Network, Video Surveillance, Enterprise Networking Common, Campus Switch & WLAN, Enterprise Gateway, Router, UPS, Network Management)
	Wav, Inc. in Aurora Ill, (selling Data Center Switch, Enterprise Gateway, IT, Cloud Computing, Access Network, Network Management, Video Surveillance, Router, Enterprise Networking Common, Enterprise Cloud Communications, UPS, Campus Switch & WLAN, Transport Network, Security)
	https://e.huawei.com/en/partner/find-a-partner
	Value Added Partners must have a 2M sales performance threshold Channel Partner Program Briefing 2018, at p. 6, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204
	Value Added Partners:
	- Act as major partners of Huawei's Enterprise BG in regional markets.
	- Promise to attain business targets for related industries and customers of Huawei's Enterprise BG.
	 Develop industry customer relationship platforms and provide support for Huawei's products to industry users.
	https://e.huawei.com/en/partner/partner-program/policy
	Value Added Partners in the United States that offer Enterprise Network products include:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Proyectos Integrales Solares SL dba Proinso US LLC
	FusionStorm
	Consolidated Electrical Distri
	Rahi Systems, Inc
	Onesource Distributors, LLC
	Sonepar Management Us, Inc.
	CANCOM US
	WORLD WIDE TECHNOLOGY, LLC
	Wesco Distribution, Inc.
	Entisys360
	China Telecom (Americas) Corporation
	See https://e.huawei.com/en/partner/find-a-partner
	Gold Partners in the United States that offer Enterprise Network products include
	Cloud Trekkers Technologies Inc
	Silver Partners in the United States that offer Enterprise Network products include
	Twotrees Technologies, LLC
	Mark III Systems, Inc
	UNeed Solutions Inc. dba Noviant
	Gold and Silver Partners have sales performance thresholds of 0.5M and 0.25M (Channel Partner Program Briefing 2018, at p. 6, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204
	Gold and Silver Partners

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	- Act as major partners of Huawei's Enterprise BG in regional markets.
	- Promise to accomplish business targets for related industries and customers of Huawei's Enterprise BG.
	 Develop industry customer relationship platforms and provide support for Huawei's products to industry users.
	https://e.huawei.com/en/partner/partner-program/policy
	Huawei also has more than 50 Authorized Partners that offer Enterprise Network products See https://e.huawei.com/en/partner/find-a-partner
	Huawei further actively encourages infringement and sales of Huawei networks by imposing penalties for violations:
	"Level-2 violation" of the partnership agreement to "direct unauthorized sales"
	"Level-3 violation" for "indirect unauthorized sales" and if a "Channel does not fulfill service contract or order" or "Provides services to customers through non-Huawei certified maintenance companies"
	Channel Partner Program Briefing 2018 at p.9, available at https://e.huawei.com/en/marketing-material/partner-document/partner/en/policy/20170428113204
[a] a plurality of stations for transmitting data in packets each having a packet type associated therewith; and	Huawei '690 Patent Accused Products comprise a plurality of stations (including, without limitation, Stations, STAs, Access Points, APs, and/or Remote Units) for transmitting data in packets each having a packet type associated therewith. One exemplary configuration is shown:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	WLAN Infrastructure Figure 1-1 WLAN Networking RADIUS RADIU

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	As shown in Figure 1-1, a WLAN consists of access points (APs), PoE switches, access controllers (ACs), Remote Authentication Dial In User Service (RADIUS) server, and network management system (NMS).
	 AP: WLAN access device. Huawei provides a series of fit APs to meet indoor and outdoor networking requirements.
	- PoE switch: upstream devices for APs. It provides data switching and power for APs. If only one AC is required and the AC has PoE ports, the PoE switch is not required.
	- AC: manages APs and controls the rights of WLAN users.
	- RADIUS server: authenticates WLAN users and assigns rights to them. The RADIUS server is installed on the SPES server.
	 NMS: manages APs and ACs. It monitors status of ACs and APs in real time, processes alarms, and analyzes data.
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 2. https://support.huawei.com/enterprise/en/doc/EDOC1000184389/1d542042/introduction-to-wlan
	In another configuration example, a WDS (Wireless Distribution System) may wirelessly connect two WLANs:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation	
	AP3 AP2 AP1 (root) AC STA Switch STA Swi	
	Huawei Technologies Co., Ltd. WLAN WDS Technology White Paper Issue 03 (2017-11-21) at 1-2. For example, Huawei WLAN products communicate using the IEEE 802.11 standards, which provide for transmitting data in packets with packet types associated therewith. Huawei 802.11ac APs are backwards compatible with 802.11a/b/g/n standards, 802.11ac APs enable existing networks to easily migrate to 802.11ac networks.	

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	[As of 2014, for enterprise networks of different types and scales, Huawei offers the following AP models: 802.11ac indoor 7X30 series and 5X30 series APs, outdoor 802.11ac 8X30 series APs, and 802.11ac AP9130DN vehicle-mounted APs specially designed for rail transit communications.
	Huawei Enterprise AP Series 802.11ac Brochure, 2014, at 2.
	See also:
	3.2 Data Packet Processing
	Packets transmitted on a WLAN include management packets and service data packets. Management packets must be transmitted over Control and Provisioning of Wireless Access Points (CAPWAP) tunnels, and service data packets can be transmitted over CAPWAP tunnels, soft GRE tunnels, or directly.
	Management packets transmit management data between an AC and AP. Data packets transmit data from STAs and the upper-layer network when WLAN users surf on the Internet.
	On a WLAN, packets transmitted between STAs and APs are 802.11 packets
	Huawei, Typical Configuration Examples, Issue 01 (2017-12-29) at 38.

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
Huav com stand relial indo	WLAN wei provides a full series of WLAN products patible with 802.11 a/b/g/n/ac/ax dards to establish high-speed, secure, and ble wireless network connections for or and outdoor applications. com/en/solutions/business-needs/enterprise-network/campus-network/cloudcampus/cloud-

'690 PATENT CLAIM 32	INFRINGEMENT BY HUAWEI CORPORATION
CLAIM 32	The AP identifies the types of neighboring wireless devices based on detected 802.11 management and data frames. The Frame Control field in the MAC header of a frame indicates the frame type. Figure 2-4 shows the subfields of the Frame Control field. Figure 2-4 MAC header of an 802.11 frame MAC Header MAC Header MAC Header MAC Header MAC Header MAC Header MAC Header

'690 PATENT CLAIM 32	Infringement By Huawei Corporation		
	802.11 management frames carry the Capability subfield in the Frame Body field. The Capability subfield contains the Extend Service Set (ESS) and Independent BSS (IBSS) bits. The AP determines whether the sender is an ad hoc device or a wireless bridge according to the ESS and IBSS bits. Figure 2-5 Capability field structure Frame Body		
	32 bytes 2 bytes 4 bytes		
	IEEE 80211 MAC Header Capability FCS		
	1bit 1bit 1bit 1bit 1bit 1bit 1bit 1bit		
	ESS IBSS CF CF-Poil Privacy Short PBC Channel Spectrum QoS Short Stot APSD Radio DSSS Delayed immediate Preamble C Agility Might QoS Time Measurement OFDM Block Ack		
	If the IBSS bit is 1, the sender is an ad hoc device. If the IBSS bit and ESS bit are both 0, the sender is a wireless bridge. If the ESS bit is 1, the sender is an AP or a STA.		

'690 PATENT CLAIM 32	Infringement By Huawei Corporation			
	Table 2-1 Ma	Table 2-1 Mapping between management frames and device types		
	ESS IBSS	Beacon, Association Response, and Reassociation Response	Association Request and Reassociation Request	
	10	AP	STA	
	01	Ad hoc device	Ad hoc device	
	00	Wireless bridge	Wireless bridge	
	11	Unused	20	
	Huawei consumer dev client stations (also red data in packets each hat Technology White Page Request, or a Reassoci STA based on the netw MAC frame") see also and MAC address of the second statement of the second statement of the second sec	Co., Ltd. WLAN WIDS & WIPA DS Technology White Paper, I ices, including laptops, phones ferred to in WIDS and documen aving a packet type. See, e.g., I oer; Issue 2.0 (2017-07-05) at 7 fation Request frame, the AP do work type specified by the Cap oid. at 11 ("Rogue STAs: After the rogue STA to send a fake un onfigured to prevent STAs in the	and tablets, also participate ntation as "STAs" or "ad ho Huawei Technologies Co., I ("When receiving a Probe etermines whether the sender ability subfield in the Framer detecting a rogue STA, a micast Deauthentication frame	e in the WIDS system as oc" devices) that transmit Ltd., WLAN WIDS & WIPS Request, an Association er is an ad hoc device or ne Body field of the 802.11 monitor AP uses the BSSID ne to contain it. A STA


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
[b] a policing station for detecting intrusions into the wireless network by	Huawei '690 Patent Accused Products comprise a policing station for detecting intrusions into the wireless network.
	For example, Huawei WLAN products utilize the WIDS technology to detect intrusions
	802.11 networks are open wireless public networks, and vulnerable to various threats caused by unauthorized APs and STAs, ad hoc networks, bogus APs, and denial of service (DoS) attacks of malicious STAs. The Wireless Intrusion Detection System (WIDS) and Wireless Intrusion Prevention System (WIPS) functions monitor and prevent the preceding attacks on WLANs.
	This document describes WIDS and WIPS technologies used by Huawei WLAN products. Enterprises can use the WIDS and WIPS functions to secure their wireless networks, reduce interference from unauthorized devices, protect STAs from malicious attacks, and deliver better user experience.
	The WIDS detects rogue STAs, malicious user attacks, and wireless network intrusions.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 1-2.
	The WIDS and WIPS functions of Huawei WLAN products ensure security of customers' wireless networks, reduce interference from rogue devices, and protect STAs from malicious attacks, delivering better user experience.
	Selection of different protection measures based on their network scale

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	The WIDS and WIPS functions provide different protection measures based on the scale of customer networks.
	-For home networks or small enterprise networks, protection measures are provided to control access of APs and STAs using blacklists and whitelists.
	-For small- and medium-scale enterprise networks, WIDS attack detection and defense are provided.
	- For medium- and large-scale enterprise networks, rogue device detection, identification, defense, and containment are provided.
	Customers can also perform other protection configurations.
	Rogue device identification and defense
	The WIDS and WIPS functions can identify rogue devices on the WLAN and take preventive measures to protect customer networks against intrusions or interference of rogue devices.
	Customer network protection against attacks
	The WIDS and WIPS functions can detect multiple types of attacks such as flood attacks, weak IV attacks, spoofing attacks, brute force WPA/WPA2/WAPI PSK cracking, and WEP shared key cracking. The functions protect customer networks from being attacked by rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 20.


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Figure 2-1 Overview of WLAN security technologies STA AP AC AAA Server Access authentication Policy control Policy control WIDS & WIPS WIDS & WIPS

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	In the preceding figure, the WIDS and WIPS are used to detect and contain rogue devices respectively. The WIDS can detect rogue APs, rogue wireless bridges, rogue STAs, ad hoc devices, and interference APs with duplicate channels. The WIPS can disassociate authorized STAs from rogue APs, and disconnect rogue STAs and ad hoc devices from the WLAN to contain rogue devices.
	NOTE APs in this document are Fit APs. Fat APs and cloud APs also provide the WIDS and WIPS functions. Different from Fat APs that provide the WIDS and WIPS functions themselves, Fit APs need to work with ACs to provide the functions.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 3.
	2.2 Rogue Device Detection
	Rogue device detection of WLANs is enabled to monitor the entire network. Monitor APs are deployed on a WLAN that needs protection to monitor the entire network. The monitor APs can periodically listen on wireless signals to detect rogue devices.
	2.2.1 Working Modes of APs
	Before enabling rogue device detection on a WLAN, configure APs' working modes.
	An AP works in normal or monitor mode.
	 Normal mode: If the WIDS and WIPS functions and other air interface scan functions are disabled on a radio, such as spectrum analysis and STA location, this radio can be used only to transmit common WLAN service data. If the WIDS and

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	WIPS functions are enabled, the working mode of the radio is automatically switched to hybrid. In addition to transmitting common WLAN service data, the radio can also provide the monitoring function. In this case, transmission of common WLAN service data is affected. • Monitor mode: A monitor AP scans devices on the WLAN and listens on all 802.11 frames on wireless channels. In this case, the monitor AP provides only the monitoring function and cannot transmit WLAN service data. The following figure shows the principles of the two working modes.
	The WISD and WIPS functions and other air interface scan functions are disabled. Channel The WISD and WIPS functions are enabled.
	Channel Ch1 Channel Ch2 Channel ChN
	Monitor mode Channel Ch1 Channel Ch2 Channel Ch3 ChN Channel Ch1 Channel Long monitoring period: Nx Monitoring period for each channel (N indicates the number of monitored channels.) Figure 2-2 Principles of the two working modes

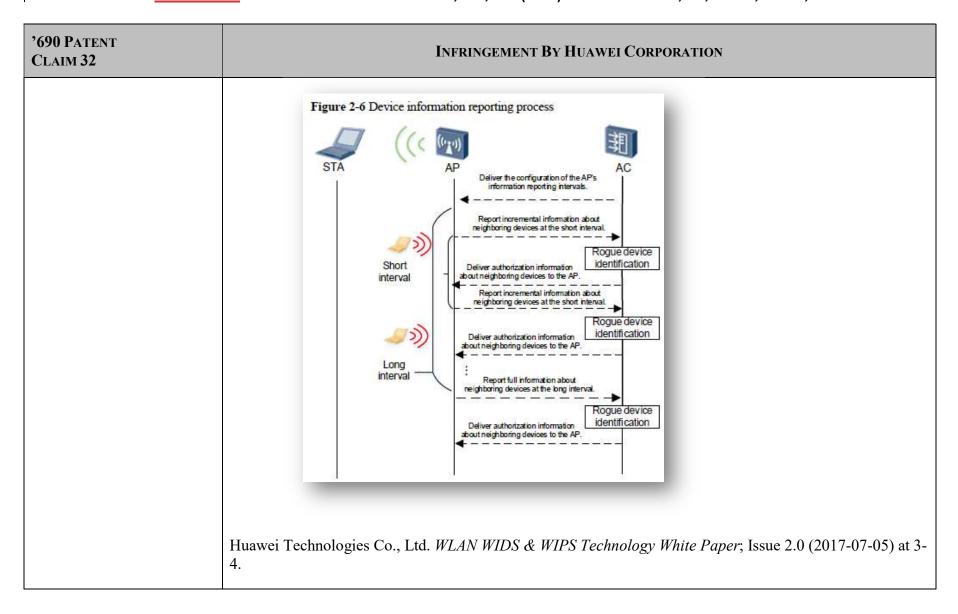

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	The device information reporting process is described as follows:
	 On the AC, a short interval is configured for the AP to report information about neighboring wireless devices. (The long interval is provided by the system by default.)
	• The AC delivers the configuration to the AP.
	• The AP listens on frames to collect information about neighboring wireless devices, and reports the information to the AC at the specified short interval. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.
	• The AP reports full information about all detected wireless devices to the AC at the long interval for information synchronization. The AC then determines whether the wireless devices are rogue devices and delivers the identification result to the AP. When the wireless devices are scanned again by the AP, the AP automatically checks whether they are rogue devices based on the identification result sent by the AC.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 8.

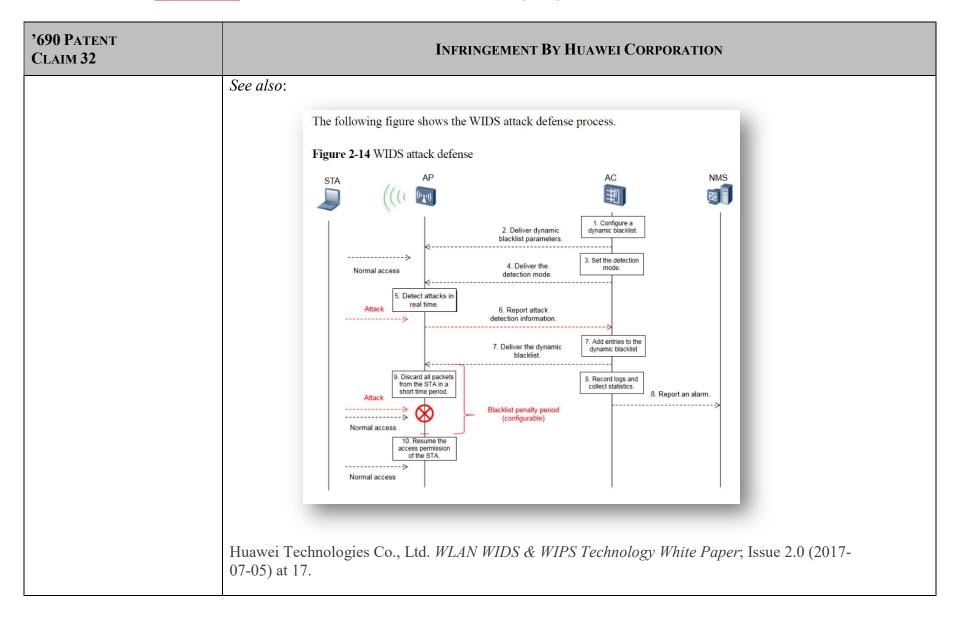


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	The Huawei eSight Platform, including at least the WLAN Manager and LogCenter Manager, is further used as a network management system that also detects intrusions into the wireless network:
	The Huawei eSight Platform further incorporates the WIDS system:
	Wireless Network Security Detection
	The Wireless Intrusion Detection System (WIDS) monitors intrusion devices and non-Wi-Fi interferences and provides frequency spectrum analysis features.
	WIDS management: The WIDS manages wireless network interferences in different categories. Interferences are classified based on user customized rules. Upon detecting an interference, the WIDS chooses whether to generate an alarm based on user alarm configurations. The WIDS can also take countermeasures for unauthorized devices.
	Huawei eSight Full Product Datasheet, CH 12 eSight WLAN Manager; p. 53 (2013-09-03) Huawei Technologies Co., Ltd.; <i>see also</i> eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 58-59 (indicating that, on information and belief, all versions of eSight incorporate WIDS).

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Rich Security Event Analysis Reports Showing Network Security Status eSight LogCenter collects security event logs about network security devices and systems, such as Huawei network UTM system, firewalls, intrusion protection system, and Anti-DDoS system, analyzes them, and generates reports to help users learn the network security status. eSight LogCenter supports DDoS attack event analysis, plug-in block analysis, access control event analysis, policy matching analysis, IPS analysis, URL filter analysis, and email filter analysis.
	Huawei eSight Full Product Datasheet, CH 11 eSight LogCenter Manager; p. 44 (2013-09-03)
	Security
	Users can monitor rogue devices, clients, interference sources, and attacks on the network, define rules to identify intrusion devices, generate remote alarm notifications, and take measures to prevent intrusions.
	1. Supports statistics and display of and countermeasure against rogue devices.
	2. Supports the display of and countermeasure against rogue clients and suppression access protection.
	3. Supports statistics and display of non-Wi-Fi interference sources.
	4. Supports statistics and display of attacks and protection against attacks.
	5. Allows users to define rules and classify rogue APs (rogue, suspected-rogue, adjacent, suspected-adjacent, and interference). Supported rule matching indicators include

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	adjacent- or same-frequency interference, signal strength, SSID (fuzzy match/regular expression), the number of detected APs, and whether to attack.
	eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 63.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can participate in the WIDS system as access points ("APs"), including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also implement intrusion detection according to the claim. See, e.g., EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").
[c] monitoring transmissions among said plurality of stations to detect collisions of packets having a predetermined packet type; and	Huawei '690 Patent Accused Products comprise policing stations, as described above in [b], that are capable of detecting intrusions by monitoring transmissions among said plurality of stations to detect collisions of packets having a predetermined packet type. For example, as described in eSight documentation, the WIDS monitors transmissions among the stations:
type; and	WIDS Wireless Intrusion Detection System
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected.
	Same or adjacent channel
	This rule is used to detect the channel deployment of APs, and detect rogue APs that operate in the same or adjacent channel. If rogue APs operate in the same channel with normal APs, eSight regards it as same-frequency interference; if rogue APs operate in an adjacent channel, eSight regards it as adjacent-frequency interference

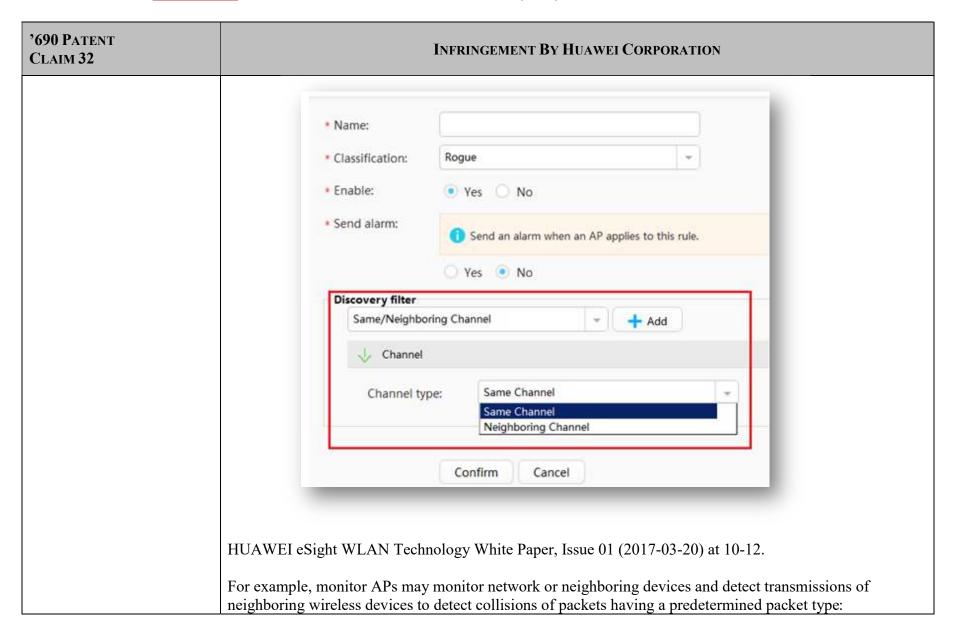

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Rogue AP: an unauthorized or malicious AP, which can be an AP that is connected to a network without permission, an unconfigured AP, a neighbor AP, or an AP manipulated by an attacker
	Monitor AP: an AP that scans or listens on wireless channels and attempts to detect attacks to the wireless network.
	Huawei Technologies Co., Ltd. <i>WLAN WIDS & WIPS Technology White Paper</i> ; Issue 2.0 (2017-07-05) at 2; see also WLAN WIDS Technology White Paper, Issue 1.0 (2014-04-24) at 3.
	2.2 Rogue Device Detection
	Rogue device detection of WLANs is enabled to monitor the entire network. Monitor APs are deployed on a WLAN that needs protection to monitor the entire network. The monitor APs can periodically listen on wireless signals to detect rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 3.
	After the WIDS and WIPS functions are configured on the AC, the monitor AP collects information about neighboring device and reports the information to the AC. When the AC identifies a rogue AP, it notifies the monitor AP of the rogue AP's identity information.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 22.
	Further, the AP monitors transmissions and detects collisions of packets having a predetermined packet type:

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	2.2.2 Wireless Device Identification
	On WLANs, APs, STAs, ad hoc devices, and wireless bridges need to be monitored. When an AP working in normal mode with air interface scan functions enabled on radios or in monitor mode, it can identify the types of neighboring wireless devices based on detected 802.11 management and data frames. The wireless device identification process is as follows:
	1. On the AC, the AP is configured to work in monitor mode or in normal mode with air interface scan functions enabled on radios.
	2. The AC delivers the configuration to the AP.
	3. The AP scans channels to collect information about neighboring wireless devices, and listens on frames sent by neighboring wireless devices to identify device types. The AP listens on the following types of frames:
	- Beacon
	- Association Request
	- Association Response
	- Reassociation Request
	- Reassociation Response
	- Probe Response

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	– Data frame
	4. The AP reports the identified device types to the AC. The AC then determines whether the identified devices are authorized and notifies the AP of rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 4.
	2.4 WIDS Attack Detection
	To protect a WLAN against attacks, you can configure real-time attack detection on APs. When detecting abnormal behavior or packets, the system considers that it is attacked and performs automatic security protection.

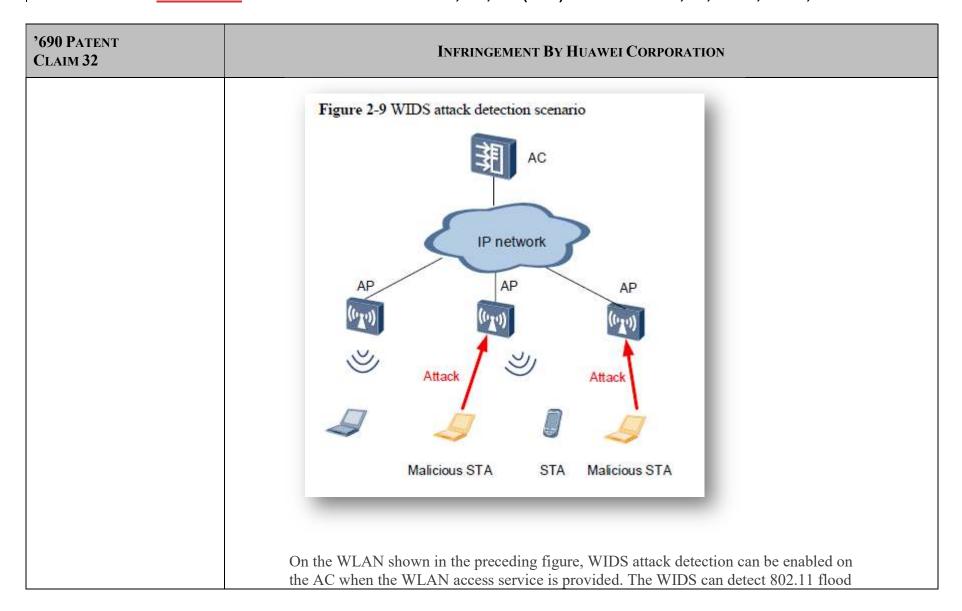

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	attacks, spoofing attacks, and weak initialization vector (IV) attacks, and can also defend the WLAN against brute force cracking.
	2.4.1 Flood Attack Detection
	A flood attack occurs when an AP receives a large number of management packets of the same type from a source MAC address within a short time period. These attack packets consume many system resources of the AP, and therefore the AP cannot process packets from authorized STAs.
	Flood attack detection allows an AP to keep monitoring the traffic rate of each STA to defend against flood attacks. When the rate of traffic received from a STA exceeds the allowed threshold (for example, more than 100 packets per second), the AP considers that the STA will flood packets and reports an alarm to the AC. If the dynamic blacklist function is enabled, the detected attack STA will be added to the dynamic blacklist. Before the dynamic blacklist entry ages out, the AP discards all the packets sent by this STA to protect the network against a flooding attack.
	An AP can detect flood attacks of the following types of frames:
	Authentication Request
	Deauthentication frame
	Association Request
	Disassociation frame
	Probe Request

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	 Action frame (extended management frame, which is used for spectrum management, QoS, and HT mode setting)
	EAPOL Start frame
	EAPOL-Logoff frame
	 PS-Poll frame (management frame sent by a STA when it recovers from the power-saving mode)


'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Figure 2-10 Flood attack AP AP AITA AROGUE STA NOTE By default, when the system receives 300 (x) packets of the same type within 60 (y) seconds (x and y are configurable), it considers that the packet sender initiates a flood attack.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 12-13.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can monitor for collisions of packets of a predetermined type, including when configured as a mobile hotspot.

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also monitor for collisions of packets of a predetermined type. <i>See, e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").
[d] generating an intrusion alert based upon detecting a threshold number of collisions of packets having the predetermined packet	In the Huawei '690 Patent Accused Products, the policing station is capable of generating an intrusion alert based upon detecting a threshold number of collisions of packets having the predetermined packet type. For example, collisions of predetermined packet types may include the packet types described below: 2.4.1 Flood Attack Detection
type.	A flood attack occurs when an AP receives a large number of management packets of the same type from a source MAC address within a short time period. These attack packets consume many system resources of the AP, and therefore the AP cannot process packets from authorized STAs.
	Flood attack detection allows an AP to keep monitoring the traffic rate of each STA to defend against flood attacks. When the rate of traffic received from a STA exceeds the allowed threshold (for example, more than 100 packets per second), the AP considers that the STA will flood packets and reports an alarm to the AC. If the dynamic blacklist function is enabled, the detected attack STA will be added to the dynamic

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	blacklist. Before the dynamic blacklist entry ages out, the AP discards all the packets sent by this STA to protect the network against a flooding attack.
	An AP can detect flood attacks of the following types of frames:
	Authentication Request
	Deauthentication frame
	Association Request
	Disassociation frame
	Probe Request
	 Action frame (extended management frame, which is used for spectrum management, QoS, and HT mode setting)
	EAPOL Start frame
	EAPOL-Logoff frame
	 PS-Poll frame (management frame sent by a STA when it recovers from the power-saving mode)

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Figure 2-10 Flood attack AC ATTA AP AP AR AR AR AR AR AR AR A
	Huawei Technologies Co., Ltd. <i>WLAN WIDS & WIPS Technology White Paper</i> ; Issue 2.0 (2017-07-05) at 12-13 (emphasis added).
	An intrusion alert is also generated in the eSight system, for example: WIDS Wireless Intrusion Detection System

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	The Wireless Intrusion Detection System (WIDS) manages information about rogue devices, interference resources, and attacks, and supports type-based recognition and alarm notification based on user-defined rules. Besides, the WIDS allows users to take countermeasures against unauthorized devices, ensuring wireless network security.
	Network administrators can classify and filter rogue APs and management alarms based on defined rules. Rule definition involves the following indicators: SSID, channel, field strength, impact scope, and attack behavior. Users can enable eSight to generate alarms when rogue APs in compliance with defined rules are detected.
	Same or adjacent channel This rule is used to detect the channel deployment of APs, and detect rogue APs that operate in the same or adjacent channel. If rogue APs operate in the same channel with normal APs, eSight regards it as same-frequency interference; if rogue APs operate in an adjacent channel, eSight regards it as adjacent-frequency interference

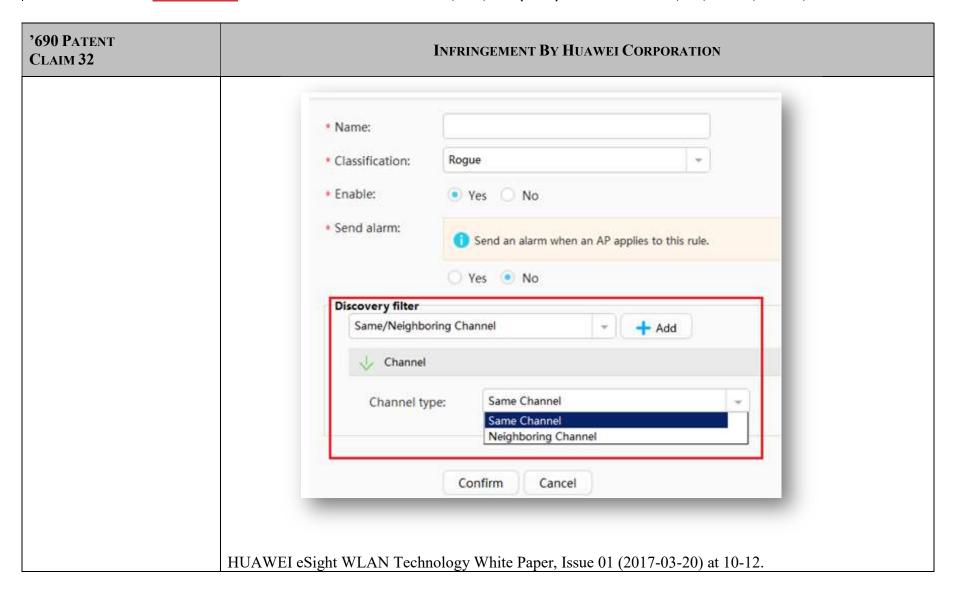

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Security
	Users can monitor rogue devices, clients, interference sources, and attacks on the network, define rules to identify intrusion devices, generate remote alarm notifications, and take measures to prevent intrusions.
	1. Supports statistics and display of and countermeasure against rogue devices.
	2. Supports the display of and countermeasure against rogue clients and suppression access protection.
	3. Supports statistics and display of non-Wi-Fi interference sources.
	4. Supports statistics and display of attacks and protection against attacks.
	5. Allows users to define rules and classify rogue APs (rogue, suspected-rogue, adjacent, suspected-adjacent, and interference). Supported rule matching indicators include adjacent- or same-frequency interference, signal strength, SSID (fuzzy match/regular expression), the number of detected APs, and whether to attack.
	eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at p. 63; <i>see also id.</i> at 74 (3. eSight supports alarms about communications, environments, rogue devices, non-Wi-Fi interference sources, and attacks to help users locate and resolve faults.).
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can generate an intrusion alert based on monitoring for collisions of packets of a predetermined type, including when configured as a mobile hotspot.

'690 PATENT CLAIM 32	Infringement By Huawei Corporation
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also generate an intrusion alert based on monitoring for collisions of packets of a predetermined type. <i>See</i> , <i>e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").

'690 PATENT CLAIM 33	Infringement By Huawei Corporation
33. The wireless network of claim 32 wherein the predetermined packet type comprises at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32. Further, the predetermined packet type described above in claim 32 further comprises at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets (for example, authentication and association packets): 2.4.1 Flood Attack Detection A flood attack occurs when an AP receives a large number of management packets of the same type from a source MAC address within a short time period. These attack packets consume many system resources of the AP, and therefore the AP cannot process packets from authorized STAs.

'690 PATENT CLAIM 33	Infringement By Huawei Corporation
	Flood attack detection allows an AP to keep monitoring the traffic rate of each STA to defend against flood attacks. When the rate of traffic received from a STA exceeds the allowed threshold (for example, more than 100 packets per second), the AP considers that the STA will flood packets and reports an alarm to the AC. If the dynamic blacklist function is enabled, the detected attack STA will be added to the dynamic blacklist. Before the dynamic blacklist entry ages out, the AP discards all the packets sent by this STA to protect the network against a flooding attack.
	An AP can detect flood attacks of the following types of frames:
	Authentication Request
	Deauthentication frame
	Association Request
	Disassociation frame
	Probe Request
	 Action frame (extended management frame, which is used for spectrum management, QoS, and HT mode setting)
	EAPOL Start frame
	EAPOL-Logoff frame
	 PS-Poll frame (management frame sent by a STA when it recovers from the power-saving mode)

'690 PATENT CLAIM 33	Infringement By Huawei Corporation
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 12-13.
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can monitor for collisions of packets of a predetermined type such as at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets, including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also monitor for collisions of packets of a predetermined type such as at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets. <i>See, e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security."), 17.

'690 PATENT CLAIM 34	Infringement By Huawei Corporation
34. The wireless network of claim 32 wherein the	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32.
threshold number of collisions	Further, the threshold number of collisions is greater than about three
is greater than about three.	By default, when the system receives 300 (x) packets of the same type within 60 (y)

'690 PATENT CLAIM 34	Infringement By Huawei Corporation
	seconds (x and y are configurable), it considers that the packet sender initiates a flood attack.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 12-13.
	In another configuration example provided in Huawei documentation, by default, the broadcast flood detection function is enabled, and the WIDS threshold may be configured to be 350 packets within 70 seconds:
	Step 7 Adjust WLAN high-density parameters.
	# Enable the broadcast flood detection function and set a broadcast flood threshold. By default, the broadcast flood detection function is enabled.
	[AC-wlan-net-prof-wlan-net] undo anti-attack broadcast-flood disable
	[AC-wlan-net-prof-wlan-net] quit
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 79.
	4.15.2 Example for Configuring Attack Detection

'690 PATENT CLAIM 34	Infringement By Huawei Corporation
	Figure 4-66 Networking for configuring attack detection P


'690 PATENT CLAIM 34	Infringement By Huawei Corporation	
	WIDS profile • Name: wlan-wids • Interval for brute force PSK cracking attack detection: 70s • Quiet time for brute force PSK cracking attack detection: 700s • Maximum number of key negotiation failures allowed within a brute force PSK cracking attack detection period: 25 • Flood attack detection interval: 70s • Quiet time for flood attack detection: 700s • Flood attack detection threshold: 350 • Dynamic blacklist: enabled IUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 693-695.	

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
36. The wireless network of claim 32 wherein said plurality of stations transmit data via a medium access control (MAC) layer; wherein each station has a MAC address associated therewith to be transmitted with data	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32. The wireless network of claim 32 further contains functionality wherein said plurality of stations transmit data via a medium access control (MAC) layer; wherein each station has a MAC address associated therewith to be transmitted with data sent therefrom; One exemplary network configuration is shown:

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
sent therefrom; and wherein said policing station further detects intrusions into the wireless network by:	Figure 1-1 WLAN Networking RADIUS Server MAN AC CAPWAP Lunnel Aggregation Switch Access Switch A

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	As shown in Figure 1-1, a WLAN consists of access points (APs), PoE switches, access controllers (ACs), Remote Authentication Dial In User Service (RADIUS) server, and network management system (NMS).
	- AP: WLAN access device. Huawei provides a series of fit APs to meet indoor and outdoor networking requirements.
	- PoE switch: upstream devices for APs. It provides data switching and power for APs. If only one AC is required and the AC has PoE ports, the PoE switch is not required.
	- AC: manages APs and controls the rights of WLAN users.
	- RADIUS server: authenticates WLAN users and assigns rights to them. The RADIUS server is installed on the SPES server.
	- NMS: manages APs and ACs. It monitors status of ACs and APs in real time, processes alarms, and analyzes data.
	HUAWEI WLAN Typical Configuration Examples, Issue 01 (2017-12-29) at 2. https://support.huawei.com/enterprise/en/doc/EDOC1000184389/1d542042/introduction-to-wlan
	In another configuration example, a WDS (Wireless Distribution System) may wirelessly connect two WLANs:

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	Figure 1-1 WDS network AP3 AP2 AP1 (root) AC STA Switch STA Switch STA Switch WVL Service VAP Huawei Technologies Co., Ltd. WLAN WDS Technology White Paper Issue 03 (2017-11-21) at 1-2.

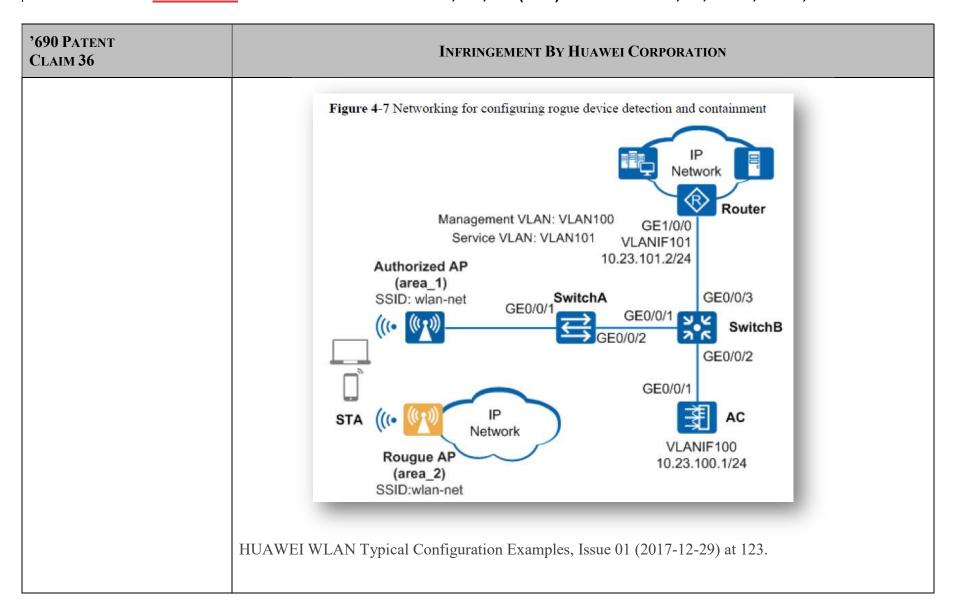


'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	On WLANs, APs, STAs, ad hoc devices, and wireless bridges need to be monitored. When an AP working in normal mode with air interface scan functions enabled on radios or in monitor mode, it can identify the types of neighboring wireless devices based on detected 802.11 management and data frames
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 4.
	For example, the network and network stations use the 802.11 standards format and transmit MAC address information in packets:


'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	Figure 2-3 Rogue device detection and identification AC IP network AP AP AP AP AP AP AP AP AP A

'690 PATENT CLAIM 36	Infringement By Huawei Corporation							
	The Frame Control field in the MAC header of a frame indicates the frame type. Figure 2-4 shows the subfields of the Frame Control field.							
	Figure 2-4 MAC header of an 802.11 frame MAC Header							
	2 bytes 2 bytes 6 bytes 6 bytes 6 bytes 2 bytes 0 - 2312 bytes 4 bytes							
	Frame Control							
	2 bits 2 bits 4 bits 1 bit 1 bit 1 bit 1 bit 1 bit 1 bit							
	Protocol Type Subtype To From More Netry DS DS Frag Retry Mgmt Data Frame Order							
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 5.							
	Each station has a MAC address associated therewith							
	Attribute Description							
	MAC address of the device							
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 9.							
	MAC address - A link layer address or physical address. It is six bytes long.							

'690 PATENT CLAIM 36	Infringement By Huawei Corporation				
	eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at 253. On information and belief Huawei consumer devices, including laptops, phones and tablets also have a MAC address associated therewith. For example, Huawei laptops and tablets such as the Matebook 13 have an associated MAC "physical address":				

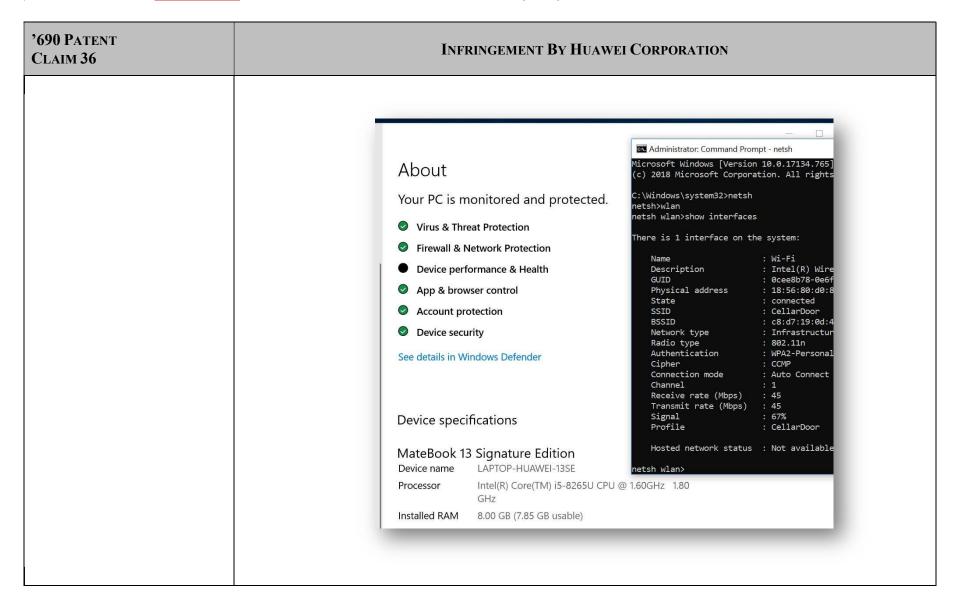

'690 PATENT CLAIM 36	Infringement By Huawei Corporation				
	The policing station further detects intrusions into the wireless network in the manner described below.				
[a] monitoring transmissions among said plurality of stations to detect collisions of a same MAC address; and	The policing station can further detect intrusions into the wireless network by monitoring transmissions among said plurality of stations to detect collisions of a same MAC address. For example, the policing station is capable of detecting the use of a same MAC address: 2.4 WIDS Attack Detection				
	To protect a WLAN against attacks, you can configure real-time attack detection on APs. When detecting abnormal behavior or packets, the system considers that it is attacked and performs automatic security protection.				

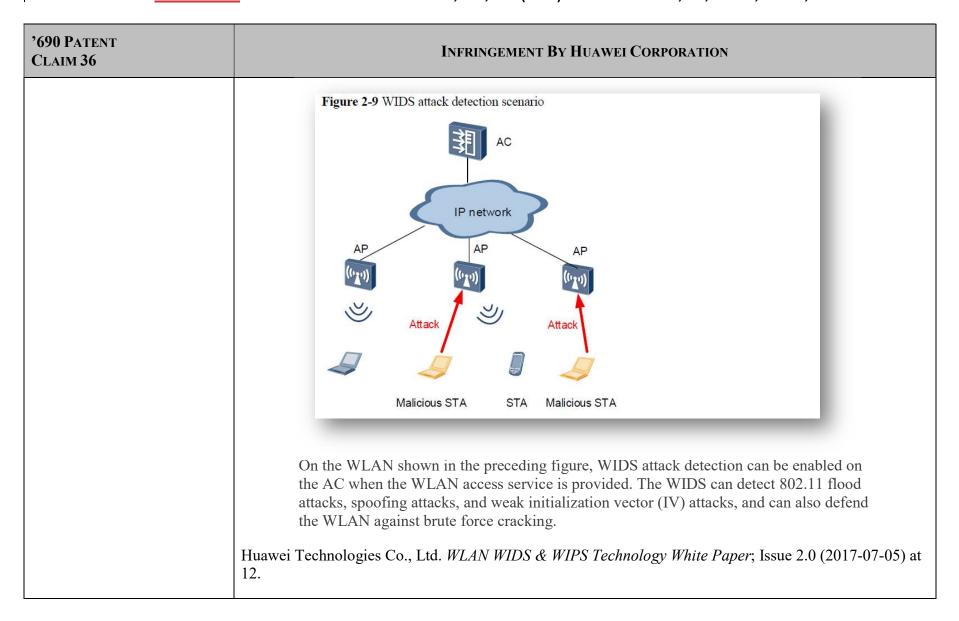


'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	2.4.2 Spoofing Attack Detection
	A spoofing attack is also called a man-in-the-middle (MITM) attack. An attacker (a rogue AP or malicious user) uses an authorized user's identity to send spoofing packets to STAs. As a result, the STAs cannot go online. Spoofing attack packets include broadcast Disassociation frames and Deauthentication frames.
	After the spoofing attack detection function is enabled, an AP checks whether the source MAC address of received Disassociation frames or Deauthentication frames is its own MAC address. If so, the WLAN is undergoing a spoofing attack of Disassociation or Deauthentication packets. The AP then sends an alarm to the AC. The AC then records a log and sends an alarm to notify the administrator.

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	Figure 2-11 Spoofing attack Rogue AP Normal data communication is interrupted In a spoofing attack, a rogue AP does not use its own MAC address. Therefore, even if the system detects the spoofing attack, it cannot obtain the real MAC address of the rogue AP. The dynamic blacklist function cannot be used to defend against spoofing attacks.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 13-14. Further, on information and belief, when collisions of the same MAC addresses are detected, the AP and/or eSight identifies these as MAC address theft and reports them as suspicious terminals: Suspicious Terminal Report Check invalid MAC addresses to detect unauthorized terminal access.

'690 PATENT CLAIM 36	Infringement By Huawei Corporation						
	Check duplicate MAC addresses to detect MAC address theft.						
	Check duplicate IP addresses to detect IP address theft.						
	Figure 2-37 Suspicious terminal						
	**Terminal Resources ** Port with Multiple MAC Addresses Repeated MAC Repeated IP						
	Summary Ryport -						
	Resource Management Device Name Device IP Access Interface						
	Terminal Access Record						
	Suspicious Terminal L 20 v Total records:0 (1)						
	Discovery Rule						
	Unauthorized Access						
	Whitelist						
	Access Binding Rule						
	Remote Notification						
	See e.g., eSight V300R007C00 Product Description, Issue 09 (2018-02-08) at 47.						
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can						
	monitor for collisions of a same MAC address, including when configured as a mobile hotspot.						
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of						
	Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also monitor for						
	collisions of a same MAC address. See, e.g., EMUI 8.0 Security Technical White Paper, available at						

'690 PATENT CLAIM 36	Infringement By Huawei Corporation				
	https://consumer-img.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").				
[b] generating an intrusion alert based upon detecting a threshold number of collisions of a same MAC address.	The policing station, can further generate an intrusion alert based upon detecting a threshold number of collisions of a same MAC address. After the spoofing attack detection function is enabled, an AP checks whether the source MAC address of received Disassociation frames or Deauthentication frames is its own MAC address. If so, the WLAN is undergoing a spoofing attack of Disassociation or Deauthentication packets. The AP then sends an alarm to the AC. The AC then records a log and sends an alarm to notify the administrator. Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 13-14.				

	'690 PATENT CLAIM 36		I	NFRINGEMI	ENT BY H	UAWEI	CORPO	RATION	
## All		and the state of t		e Business Configuration	Reports System quicks	start		5 ⊙ 0 ⊙ 4 № 0 ⊕ 0 ⊙ 2 admi	G P & 7 /
Chemistry MAC Channel Middles Land Cases Term Term Country									
Pictoring		All DA							All -
### Reading ### 10% 15 00% 60% 12 44 2011 10 00% 60% 12 10 10 10 00% 12 10 10 10 10 10 10 10 10 10 10 10 10 10		Overview							2/250000000
Periodry \$1.501.510.00.013 1 - 44 2011.101.00.0020 169.998-00minostrolerococh G. Periodry \$1.501.510.00.013 1 - 44 2011.101.00.0020 169.998-00minostrolerococh G. Periodry \$1.501.510.00.014 1 - 44 2011.101.00.0020 169.998-00minostrolerococh G. Periodry \$1.501.510.00.013 1 - 44 2011.101.		AC			1.5				
Florading \$7.41.15 de \$21.20 1 -64 2011-11 0 1 0 0 2 1 days Woundhinders becomed C			THE PROPERTY OF						
Clear		AP							
Region		Client			1	-64		1days4hours0minutes0seconds	
Region		SSID			1			1days4hours0minutes0seconds	
Security					1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	0
Security		Region	Flooding	87-01-15-08-01-03	1	-64	2013-11-01 06/26/02	1days4hours0minutes0seconds	0
Roging Position		⊙ Security	Flooding		1	-64	2013-11-01 08:26:02	1days4hours0minutes0seconds	6
Roogue Device		Rule	Flooding	87-01-15-08-01-2E	1	-64	2013-11-01 06:26:02	2days4hours0minutes0seconds	0
Recoling \$1-0.15-0.00.103 1			Flooding	87-01-15-08-01-18	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	0
		Rogue Device	Flooding	87-01-15-08-01-04	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	0
Flooding \$17-61-25-06-01-05 1		Rogue Client	Flooding	87-01-15-08-01-29	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	G
Flooding \$141;13:06:01:30 1 -64 2011;13:01:02:003 1days@humcheinutes@herends G. Flooding \$174;15:06:01:30 1 -64 2011;13:01:02:003 1days@humcheinutes@herends G. Flooding \$174;15:06:01:31 1 -64 2011;13:00:000 1days@humcheinutes@herends G. Flooding \$174;15:06:01:31 1 -64 2011;13:00:000 1days@humcheinutes@herends G. Flooding \$174;15:06:01:31 1 -64 2011;13:10:02:000 1days@humcheinutes@herends G. Flooding \$174;15:06:01:31 1		Attack	Flooding	87-01-15-08-01-1C	1	-64	2013-11-01 06:26:02	2days4hours0minutes0seconds	6
Rooding \$141,35 de \$4.00 1		Interferor	Flooding	87-01-15-08-01-05	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	6
			Flooding	87-01-15-06-01-10	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	6
Flooding 87-21-15-08-02-11 2 -64 2013-11-03-063-063 EdgysPhountPrinings Cheerends Q Flooding 87-021-3-08-02-28 2 -64 2013-11-03-063-02 EdgysPhountPrinings Cheerends Q 20 Total records 24 2 3		Energy Saving Policy	Flooding	87-01-15-08-01-10	1	-64	2013-11-01 06:26:02	Idays4hours0minutes0seconds	0
Recoding			Flooding	87-01-15-08-01-12	1 1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	0
20 * Total records 24 < 1 2 >			Flooding	B7-01-15-08-01-11		-64	2013-11-01-06-26-02	1days4hours0minutes0seconds	0
			Flooding	87-01-15-06-01-2A	1	-64	2013-11-01 06:26:02	1days4hours0minutes0seconds	0
			20 - Total reco	rds: 24 () 2 >					
Display information about attacks upon the current wireless network.									
		Display inf	ormation	about attacks	upon the cu	rrent wir	eless netw	ork.	
	T	IIIIAWEI acialawii AN	XX71.:4 -	Daman I	- 01 (201	7 02 24	n -4 11		
THEA WELL STATE WILL AND WILLIAM Devices 11 (2017) 02 (20) 4 11	j	HUAWELESIONEWLAN	w nite	raper Issu	e UT (7.01	7-03-20	บาลบาโ		
HUAWEI eSight WLAN White Paper, Issue 01 (2017-03-20) at 11.			,,,,,,,,,	I apoi, ibba	- 01 (-01	, 00 =	<i>o , a</i> c 11.		

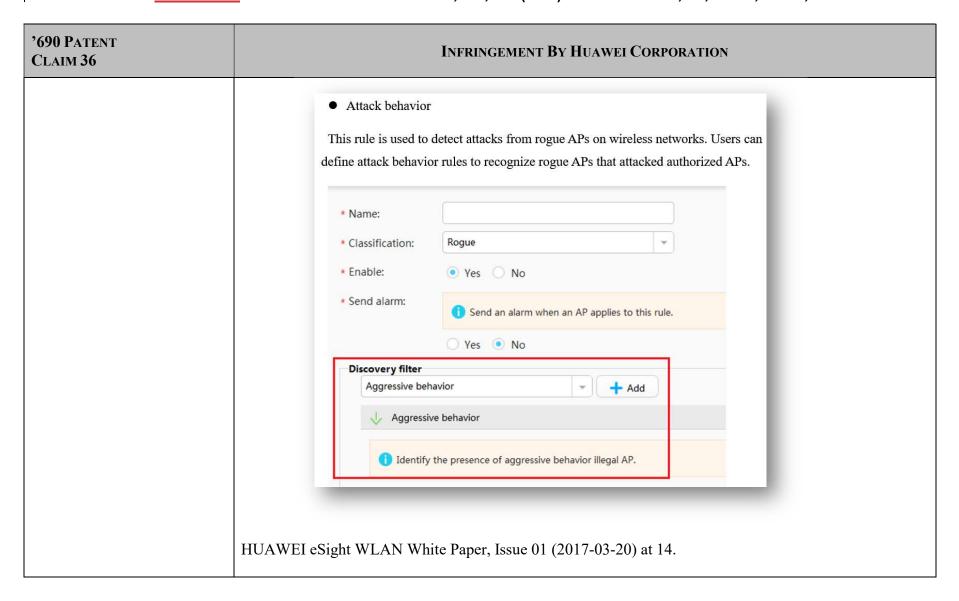

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	You can configure security rules to classify and filter rogue APs and trigger alarm sending accordingly. Therefore, network administrators can quickly locate and handle the problems to improve network security.
	1. Enter the region object manager.
	2. Choose Security > Rule from the navigation tree.
	3. Set the mask length of BSSIDs.
	After the mask length of BSSIDs is set, rogue APs with similar BSSIDs are associated to one physical device. A larger mask length makes it easier to associate rogue APs with similar BSSIDs to one physical device.
	For example, if this parameter is set to 4, eSight converts the last two digits of BSSIDs into binary bits and compares the last four bits of the BSSIDs. If some BSSIDs have identical last four bits, eSight associates the BSSIDs to one physical device.
	4. Create a rule.
	Click +Create and set basic parameters and discovery filter for the rule.
	- Channel: Match rogue devices of the Same Channel or Neighboring Channel.
	– SSID: Set SSID for matching rogue devices.
	- Signal Strength: Set Strength(dBm) for matching rogue devices.
	– Detecting the number of AP: Set AP's Number for matching rogue devices.

'690 PATENT CLAIM 36	Infringement By Huawei Corporation
	 Aggressive behavior: Specify this parameter for identifying rogue APs that make attacks.
	 Valid users association: Identify users that have connected to rogue APs.
	eSight Operation Guide, Issue 08 (2018-08-28) at 1357 <u>.</u>
	On information and belief Huawei consumer devices, including laptops, phones and tablets also can generate an intrusion alert based on detecting a threshold number of collisions of a same MAC address, including when configured as a mobile hotspot.
	Huawei consumer devices, including laptops, phones and tablets implementing the security features of Huawei's EMUI operating system, including its "Wi-Fi threat detection" functionality, also generate an intrusion alert based on detecting a threshold number of collisions of a same MAC address. <i>See</i> , <i>e.g.</i> , EMUI 8.0 Security Technical White Paper, available at https://consumerimg.huawei.com/content/dam/huawei-cbg-site/en/mkt/legal/privacy-policy/EMUI%208.0%20Security%20Technology%20White%20Paper.pdf, at 15 ("Wi-Fi connection can be authenticated using various methods, such as WEP, WPA/WPA2 PSK, 802.1x EAP, WPS, and WAP" and "EMUI provides Wi-Fi threat detection engine on access points. It detects the Wi-Fi to be connected. Once security risks are detected, it will notify users so that they can take measures to ensure connection security.").

'690 PATENT CLAIM 37	Infringement By Huawei Corporation		
37. The wireless network of claim 32 wherein the	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32.		

'690 PATENT CLAIM 37	Infringement By Huawei Corporation
threshold number of collisions is greater than about three.	Further, the threshold number of collisions is greater than about three.
	See Claim 34.

'690 PATENT CLAIM 38	Infringement By Huawei Corporation
38. The wireless network of claim 32 wherein said policing station further transmits an intrusion alert to at least one of said plurality of stations.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32. Further, said policing station further transmits an intrusion alert to at least one of said plurality of stations. For example, the monitor AP generates and transmits intrusion alert information to the AC, and the AC reports intrusion alert information: On WLANs, APs, STAs, ad hoc devices, and wireless bridges need to be monitored. When an AP working in normal mode with air interface scan functions enabled on radios or in monitor mode, it can identify the types of neighboring wireless devices based on detected 802.11 management and data frames. The wireless device identification process is as follows: 1. On the AC, the AP is configured to work in monitor mode or in normal mode with air interface scan functions enabled on radios. 2. The AC delivers the configuration to the AP.

'690 PATENT CLAIM 38	Infringement By Huawei Corporation
	3. The AP scans channels to collect information about neighboring wireless devices, and listens on frames sent by neighboring wireless devices to identify device types. The AP listens on the following types of frames:
	- Beacon
	- Association Request
	- Association Response
	- Reassociation Request
	- Reassociation Response
	- Probe Response
	– Data frame
	4. The AP reports the identified device types to the AC. The AC then determines whether the identified devices are authorized and notifies the AP of rogue devices.
	Huawei Technologies Co., Ltd. WLAN WIDS & WIPS Technology White Paper; Issue 2.0 (2017-07-05) at 4.

'690 PATENT CLAIM 39	Infringement By Huawei Corporation
39. The wireless network of claim 32 wherein said policing station comprises at least one of a base station and a wireless station.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32. Further, the policing station in the wireless network of claim 32 comprises at least one of a base station and a wireless station. For example, the policing station may be a Monitor AP. See claim 32[b] above.

'690 PATENT CLAIM 40	Infringement By Huawei Corporation
40. A wireless local or metropolitan area network comprising:	The Huawei '690 Patent Accused Products infringe this claim. See Claim 32 [preamble].
[a] a plurality of stations for transmitting data via a medium access control (MAC) layer, each station having a MAC address associated therewith to be transmitted with data sent therefrom; and	The Huawei '690 Patent Accused Products comprise a plurality of stations for transmitting data via a medium access control (MAC) layer, each station having a MAC address associated therewith to be transmitted with data sent therefrom. See Claim 36.

'690 PATENT CLAIM 40	Infringement By Huawei Corporation
[b] a policing station for detecting intrusions into the wireless network by	The Huawei '690 Patent Accused Products comprise a policing station for detecting intrusions into the wireless network See Claim 32[b]
[c] monitoring transmissions among said plurality of stations to detect collisions of a same MAC address; and	The Huawei '690 Patent Accused Products are capable of monitoring transmissions among said plurality of stations to detect collisions of a same MAC address. See Claim 36[a].
[d] generating an intrusion alert based upon detecting a threshold number of collisions of a same MAC address.	The Huawei '690 Patent Accused Products are capable of generating an intrusion alert based upon detecting a threshold number of collisions of a same MAC address. See Claim 36[b].

'690 PATENT CLAIM 41	Infringement By Huawei Corporation
41. The wireless network of claim 40 wherein the threshold number of collisions is greater than about three.	The Huawei '690 Patent Accused Products infringe this claim. <i>See</i> Claim 40 Further, the threshold number of collisions is greater than about three. See Claim 34.

'690 PATENT CLAIM 42	Infringement By Huawei Corporation
42. The wireless network of claim 40 wherein said policing station further transmits an intrusion alert to at least one of said plurality of stations.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 40 Further, said policing station further transmits an intrusion alert to at least one of said plurality of stations. See Claim 38.

'690 PATENT CLAIM 43	Infringement By Huawei Corporation
43. The wireless network of claim 40 wherein said policing station comprises at least one of a base station and a wireless station.	The Huawei '690 Patent Accused Products infringe this claim. <i>See</i> Claim 40. Further, said policing station comprises at least one of a base station and a wireless station. <i>See</i> Claim 39.

'690 PATENT CLAIM 71	Infringement By Huawei Corporation
71. An intrusion detection method for a wireless local or metropolitan area network comprising a plurality of	The Huawei '690 Patent Accused Products infringe this claim. The Huawei '690 Patent Accused Products use an intrusion detection method for a wireless local or metropolitan comprising a plurality of stations. See Claims 32[preamble], 32[a].

'690 PATENT CLAIM 71	Infringement By Huawei Corporation
stations, the method comprising:	
[a] transmitting data in packets between the plurality of stations, each packet having a packet type associated therewith;	The method of the Huawei '690 Patent Accused Products transmits data in packets between the plurality of stations, each packet having a packet type associated therewith. See Claim 32[a].
[b] monitoring transmissions among the plurality of stations to detect collisions of packets having a predetermined packet type; and	The method of the Huawei '690 Patent Accused Products monitors transmissions among the plurality of stations to detect collisions of packets having a predetermined packet type. See Claim 32 [c].
[c] generating an intrusion alert based upon detecting a threshold number of collisions of packets having the predetermined packet type.	The method of the Huawei '690 Patent Accused Products generates an intrusion alert based upon detecting a threshold number of collisions of packets having the predetermined packet type. See Claim 32 [d].

'690 PATENT CLAIM 72	Infringement By Huawei Corporation
72. The method of claim 71 wherein the predetermined packet type comprises at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 71. Further, the predetermined packet type comprises at least one of authentication packets, association packets, beacon packets, request to send (RTS) packets, and clear to send (CTS) packets. See Claim 33.

'690 PATENT CLAIM 73	Infringement By Huawei Corporation
73. The method of claim 71 wherein the threshold number of collisions is greater than about three.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 71. Further, the threshold number of collisions is greater than about three. See Claim 34.
'690 PATENT CLAIM 75	Infringement By Huawei Corporation
75. The method of claim 71 wherein the plurality of stations transmit data packets	The Huawei '690 Patent Accused Products infringe this claim. See Claim 71.

'690 PATENT CLAIM 75	Infringement By Huawei Corporation
each station has a MAC address associated therewith to be transmitted with data packets sent therefrom; and further comprising:	Further, the plurality of stations transmit data packets via a medium access control (MAC) layer, and wherein each station has a MAC address associated therewith to be transmitted with data packets sent therefrom. See Claim 36.
[a] monitoring transmissions among the plurality of stations to detect collisions of a same MAC address; and	The Huawei '690 Patent Accused Products monitor transmissions among the plurality of stations to detect collisions of a same MAC address See Claim 36[a]
[b] generating an intrusion alert based upon detecting a threshold number of collisions of a same MAC address.	The Huawei '690 Patent Accused Products generate an intrusion alert based upon detecting a threshold number of collisions of a same MAC address See Claim 36[b]

'690 PATENT CLAIM 76	Infringement By Huawei Corporation
76. The method of claim 75 wherein the threshold number of collisions is greater than about three.	The Huawei '690 Patent Accused Products infringe this claim. <i>See</i> Claim 75. Further, the threshold number of collisions is greater than about three. <i>See</i> Claim 34.

'690 PATENT CLAIM 77	Infringement By Huawei Corporation
77. The method of claim 71 further comprising transmitting the intrusion alert to at least one of the plurality of stations.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 71.
	Further, the method comprises transmitting the intrusion alert to at least one of the plurality of stations See Claim 38.

'690 PATENT CLAIM 78	Infringement By Huawei Corporation
78. An intrusion detection method for a wireless local or metropolitan area network comprising a plurality of stations, the method comprising:	The Huawei '690 Patent Accused Products infringe this claim. The Huawei '690 Patent Accused Products use an intrusion detection method for a wireless local or metropolitan area network comprising a plurality of stations See Claim 32 [preamble], 32[a].
[a] transmitting data via a medium access control (MAC) layer between the plurality of stations, each station having a MAC address associated therewith to be transmitted with data sent therefrom;	The method used in the Huawei '690 Patent Accused Products transmits data via a medium access control (MAC) layer between the plurality of stations, each station having a MAC address associated therewith to be transmitted with data sent therefrom See Claims 36 [a]; 40 [a]

'690 PATENT CLAIM 78	Infringement By Huawei Corporation
[b] monitoring transmissions among the plurality of stations to detect collisions of a same MAC address; and	The method used in the Huawei '690 Patent Accused Products monitors transmissions among the plurality of stations to detect collisions of a same MAC address See Claims 36 [a]; 40[c]
[c] generating an intrusion alert based upon detecting a threshold number of collisions of a same MAC address.	The method used in the Huawei '690 Patent Accused Products generates an intrusion alert based upon detecting a threshold number of collisions of a same MAC address. See Claims 36 [b]; 40[d]

'690 PATENT CLAIM 79	Infringement By Huawei Corporation
79. The method of claim 78 wherein the threshold number of collisions of a same MAC address is greater than about three.	The Huawei '690 Patent Accused Products infringe this claim. See Claim 78. Further, the threshold number of collisions of a same MAC address is greater than about three. See Claim 34

'690 PATENT CLAIM 80	Infringement By Huawei Corporation
80. The method of claim 78 further comprising	The Huawei '690 Patent Accused Products infringe this claim. See Claim 78.

transmitting the intrusion alert	The Instrumentalities further are capable of transmitting the intrusion alert to at least one of the plurality of
to at least one of the plurality	stations.
of stations.	
	See claim 38.